


CalnCall SIP Configuration with BeroNet VoIP Gateway

Step 1:

Click below link to download CalnCall SIP profile:

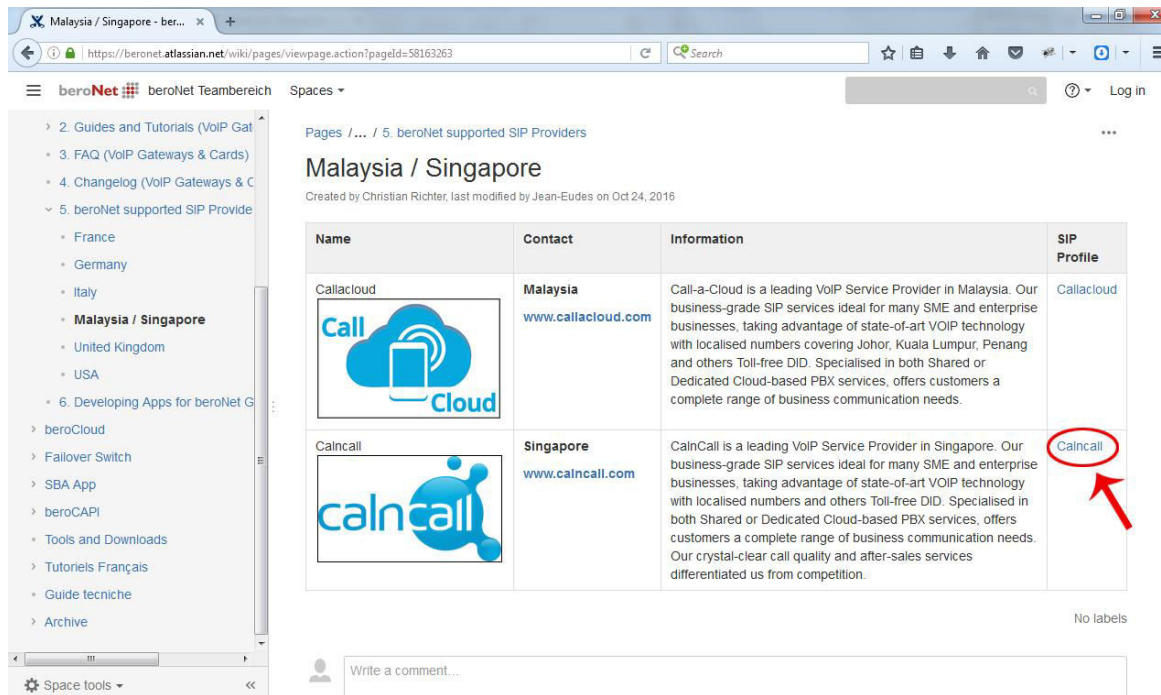

<https://beronet.atlassian.net/wiki/pages/viewpage.action?pageId=58163263>



Pages / ... / 5. beroNet supported SIP Providers


Malaysia / Singapore

Created by Christian Richter, last modified by Jean-Eudes on Oct 24, 2016

Name	Contact	Information	SIP Profile
 Callacloud	Malaysia www.callacloud.com	Call-a-Cloud is a leading VoIP Service Provider in Malaysia. Our business-grade SIP services ideal for many SME and enterprise businesses, taking advantage of state-of-art VOIP technology with localised numbers covering Johor, Kuala Lumpur, Penang and others Toll-free DID. Specialised in both Shared or Dedicated Cloud-based PBX services, offers customers a complete range of business communication needs.	Callacloud
 calncall	Singapore www.calncall.com	CalnCall is a leading VoIP Service Provider in Singapore. Our business-grade SIP services ideal for many SME and enterprise businesses, taking advantage of state-of-art VOIP technology with localised numbers and others Toll-free DID. Specialised in both Shared or Dedicated Cloud-based PBX services, offers customers a complete range of business communication needs. Our crystal-clear call quality and after-sales services differentiated us from competition.	Calncall

No labels

Step: 2

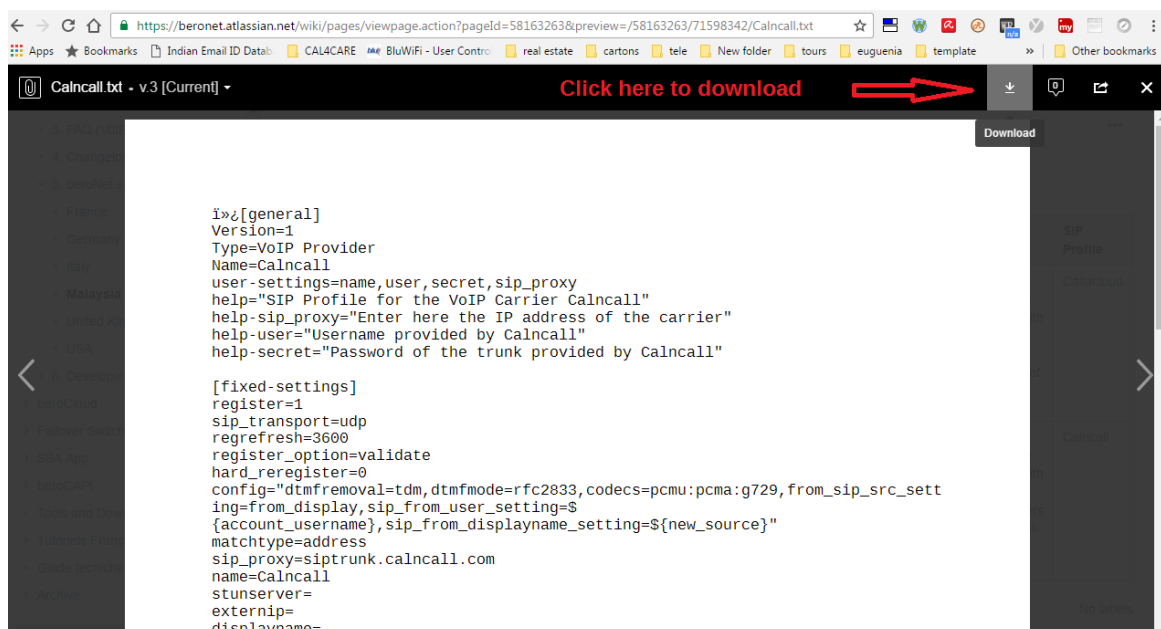


Click here to download

```

i>¿[general]
Version=1
Type=VoIP Provider
Name=Calncall
user-settings=name,user,secret,sip_proxy
help="SIP Profile for the VoIP Carrier Calncall"
help-sip_proxy="Enter here the IP address of the carrier"
help-user="Username provided by Calncall"
help-secret="Password of the trunk provided by calncall"

[fixed-settings]
register=1
sip_transport=udp
regrefresh=3600
register_option=validate
hard_reregister=0
config="dtmfremoval=tdm,dtmfmode=rfc2833,codecs=pcmu:pcma:g729,from_sip_src_sett
ing=from_display,sip_from_user_setting=$
{account_username},sip_from_displayname_setting=${new_source}"
matchtype=address
sip_proxy=siptrunk.calncall.com
name=Calncall
stunserver=
externip=
displayname=
  
```

Step: 3

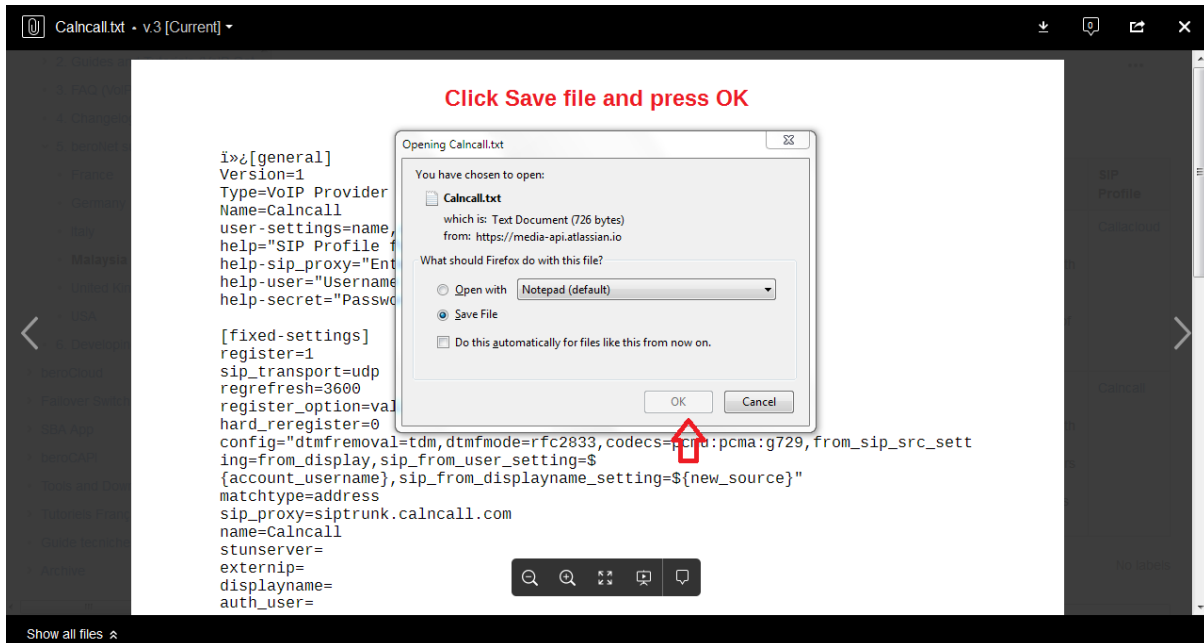

Step: 4


Please login into BeroNet Gateway

Default IP: 10.0.0.2

Username: admin Password: admin

For more details:


<http://www.beronet.com/wp-content/uploads/downloads//berofix/docs/Quick-Installation-Guide.pdf>

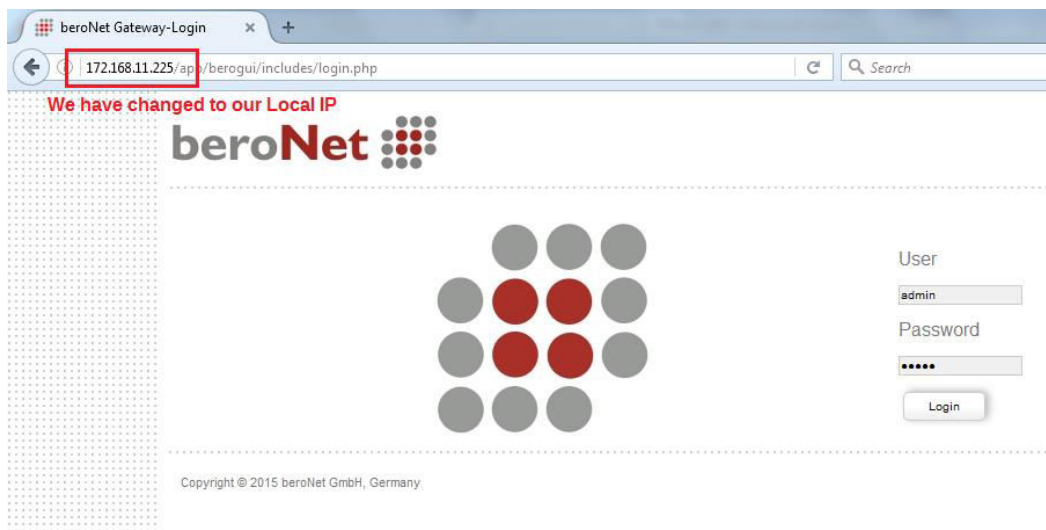

Step: 5

We must need firmware 16.x to upload the CalnCall SIP Profile.


We have to upload CalnCall SIP profile under SIP profile management as shown in below Fig.

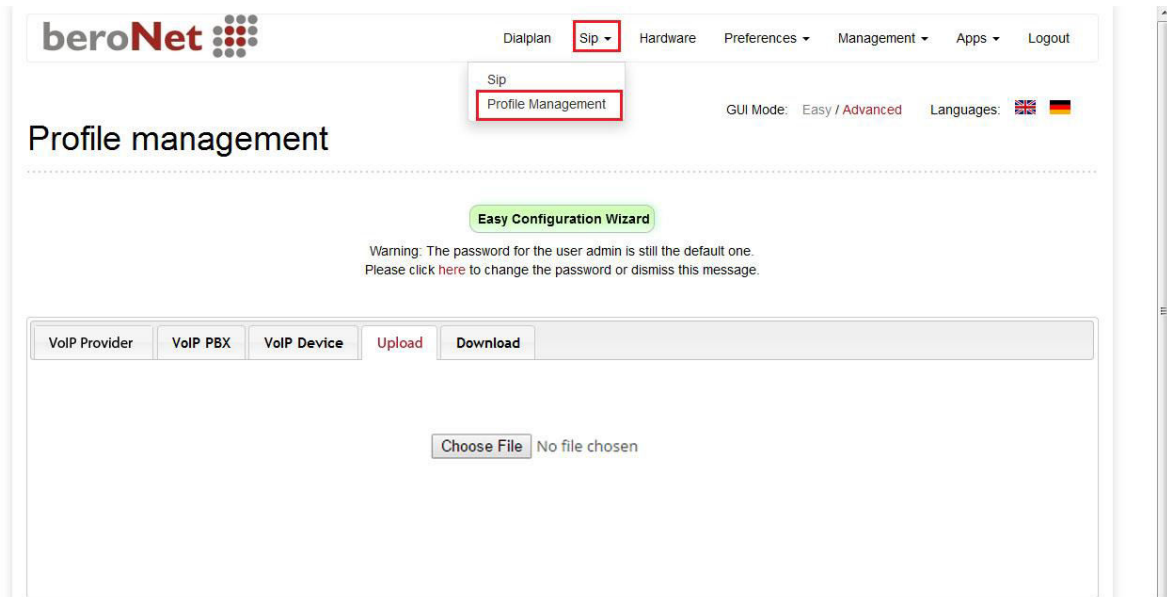

The screenshot shows the BeroNet web interface. At the top, there is a navigation menu with 'Dialplan', 'Sip', 'Hardware', 'Preferences', 'Management', 'Apps', and 'Logout'. The 'Sip' menu is expanded, showing 'Sip' and 'Profile Management' (highlighted with a red box). Below the navigation, the page title is 'Profile management'. There is a warning message: 'Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message.' Below the warning, there are tabs for 'VoIP Provider', 'VoIP PBX', 'VoIP Device', 'Upload', and 'Download'. The 'Upload' tab is selected, and it contains a 'Choose File' button and the text 'No file chosen'.

Step: 6

Now you can able to see the CalnCall SIP profile under VoIP provider as shown in below Fig.

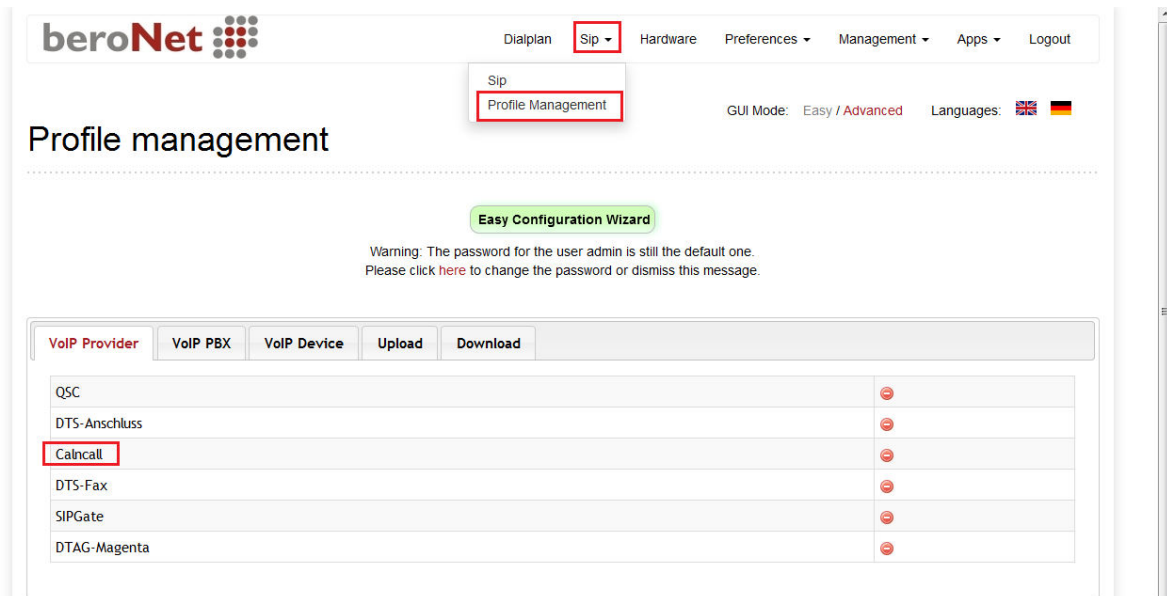


The screenshot shows the BeroNet web interface. At the top, there is a navigation menu with 'Dialplan', 'Sip', 'Hardware', 'Preferences', 'Management', 'Apps', and 'Logout'. The 'Sip' menu is expanded, showing 'Sip' and 'Profile Management' (highlighted with a red box). Below the navigation, the page title is 'Profile management'. There is a warning message: 'Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message.' Below the warning, there are tabs for 'VoIP Provider', 'VoIP PBX', 'VoIP Device', 'Upload', and 'Download'. The 'VoIP Provider' tab is selected, and it contains a table of providers:

VoIP Provider	VoIP PBX	VoIP Device	Upload	Download
QSC				
DTS-Anschluss				
Calncall				
DTS-Fax				
SIPGate				
DTAG-Magenta				

Step: 7

Go to Sip → Press Add button

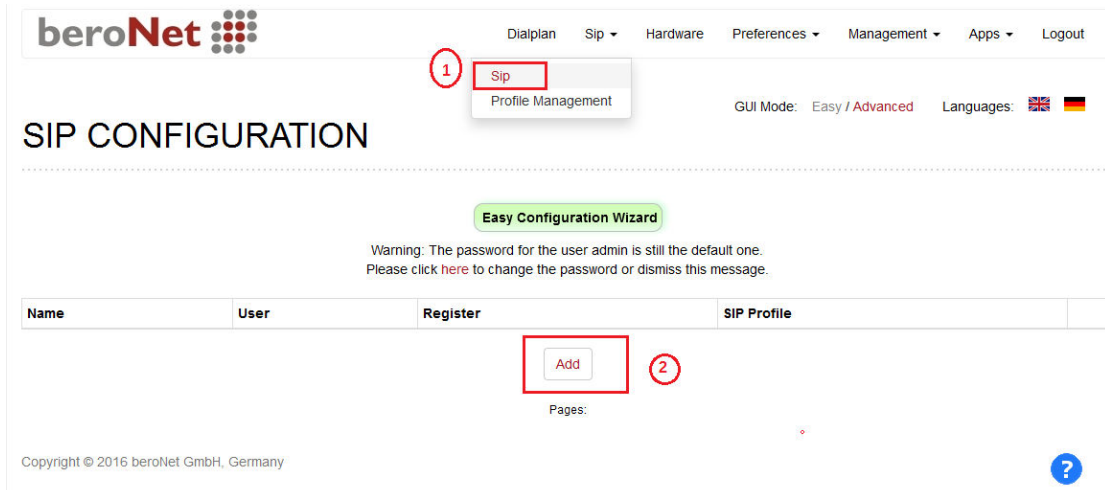

beroNet Dialplan Sip Hardware Preferences Management Apps Logout

SIP CONFIGURATION

Easy Configuration Wizard

Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message.


Name	User	Register	SIP Profile

Pages: 1

Copyright © 2016 beroNet GmbH, Germany

Step: 8

Select SIP profile → VoIP Provider → Calncall → Press Next button

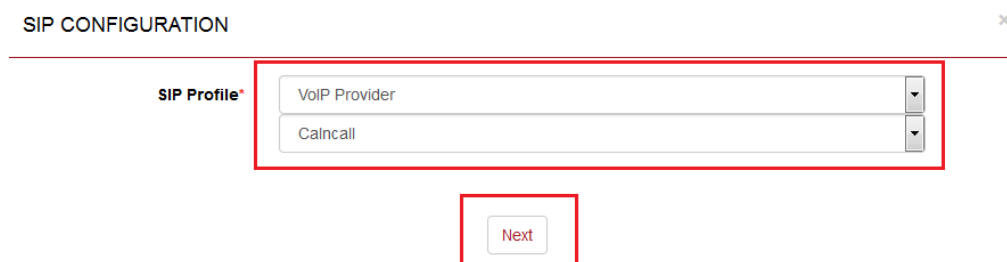

SIP CONFIGURATION


SIP Profile*
VoIP Provider
Calncall

Next

Step: 9

To get CalnCall Account Details, please contact <http://www.calncall.com/>

Step: 10

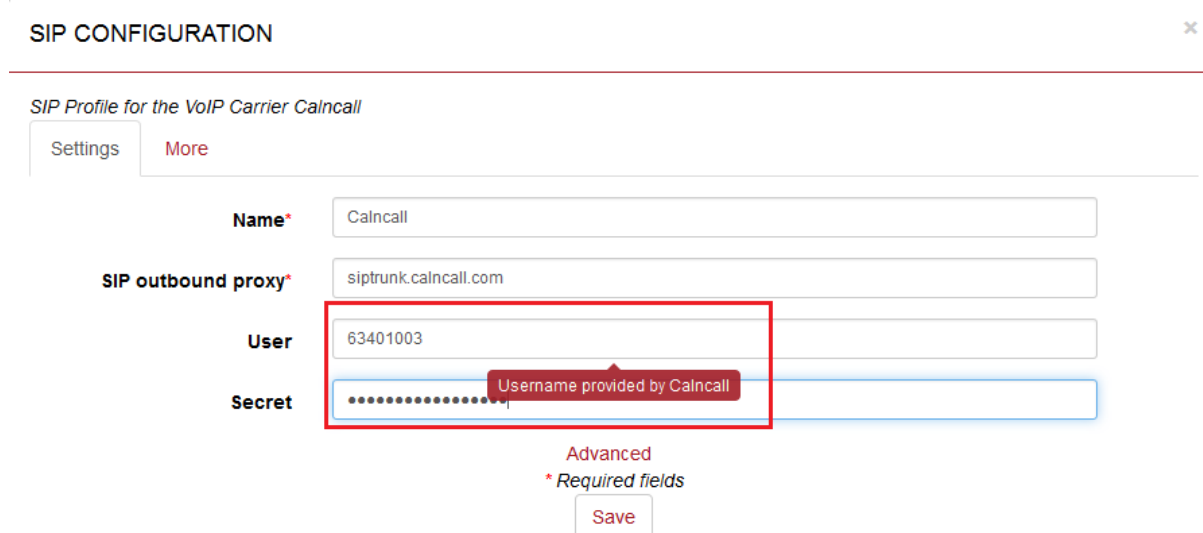

SIP CONFIGURATION

SIP Profile for the VoIP Carrier Calncall

Settings More

Name* Calncall

SIP outbound proxy* siptrunk.calncall.com

User 63401003

Secret Username provided by Calncall

Advanced
* Required fields

Save

Step: 11

To apply the settings click activate button.

SIP CONFIGURATION

activate


Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message.

Name	User	Register	SIP Profile
Calncall	63401003	1	VoIP Provider-Calncall

Add

Step: 12

To see the CalnCall SIP Trunk registration status Go to Management → State

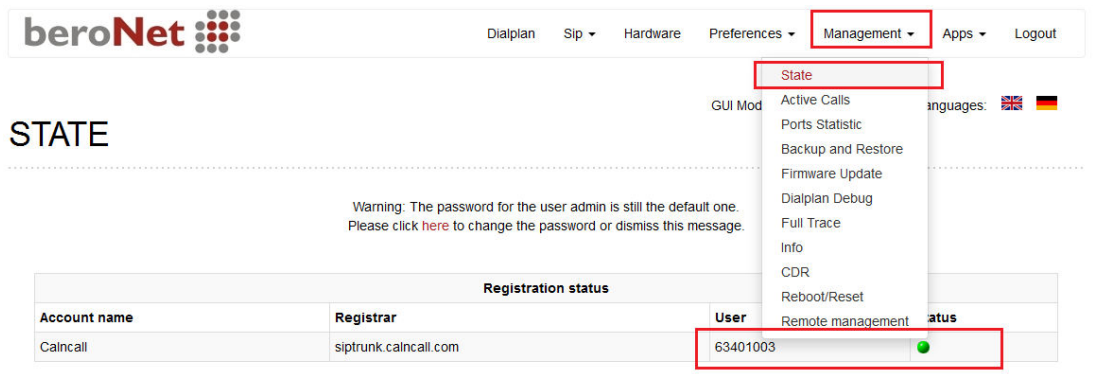

The screenshot shows the BeroNet Management interface with the 'State' menu item highlighted. Below the navigation bar, the 'STATE' section is visible. A warning message is present: "Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message." Below the warning is a table titled "Registration status":


Account name	Registrar	User	Status
Calncall	siptrunk.calncall.com	63401003	●

Step 13:

In order to make / receive calls via CalnCall SIP Trunk as shown below figure.

For more details about BeroNet dial plan, please visit:

<http://www.beronet.com/understanding-the-beronet-dialplan/>

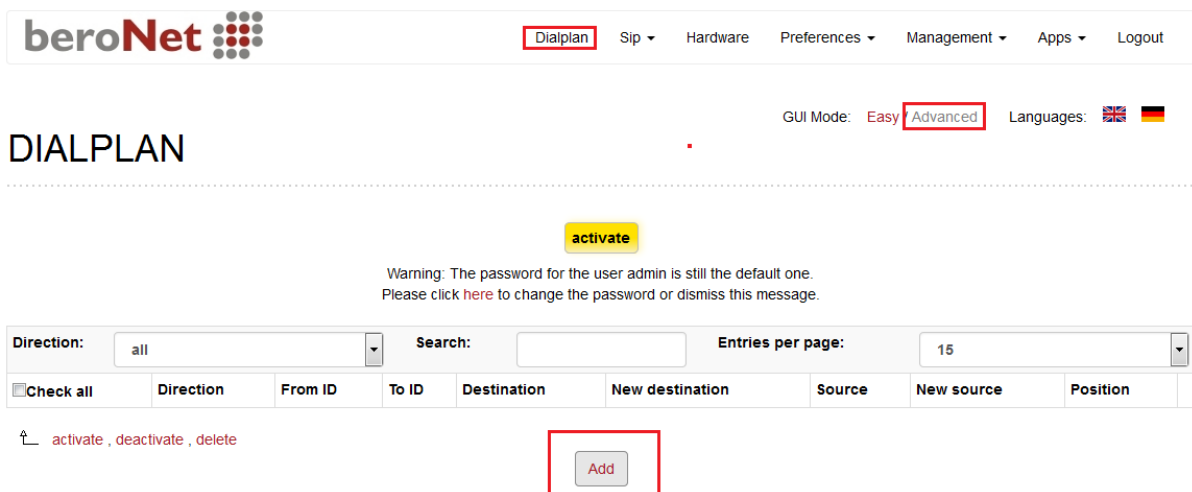

The screenshot shows the BeroNet Dialplan configuration page. The 'Dialplan' menu item is highlighted in the navigation bar. Below the navigation bar, the 'DIALPLAN' section is visible. A warning message is present: "Warning: The password for the user admin is still the default one. Please click [here](#) to change the password or dismiss this message." Below the warning is a table with the following columns: Direction, From ID, To ID, Destination, New destination, Source, New source, and Position. The table is currently empty. Below the table are links for "activate", "deactivate", and "delete", and an "Add" button.